

4415

Protective wax Spray

Product description

The protective wax spray is a well-adhering, water-displacing anti-corrosion wax for the preservation of cavities and internal parts of vehicles and metal components. With the deep-acting formulation, it is particularly suitable for hard-to-reach folds, joints and surfaces. Also excellent as a corrosion inhibitor for machines, machine parts and equipment for outdoor storage. After evaporation of the solvent, the product gives a slightly tacky, elastic and waxy film and resists the highest atmospheric impact.

Advantages

- Due to the high elasticity no cracks occur even with temperature-related material movements.
- - Very good salt water resistance.
- - High creeping ability for sealing smallest cracks.
- - Also suitable for chrome and painted surfaces, as well as rubber
- - Very good temperature resistance


Application fields

Cavities and internal parts of vehicles and metal components in outdoor storage.

Application

1. The substrate should be dry, dust, grease and rust free.
2. Bring the can to room temperature and shake vigorously
3. Spray the surface to be treated several times thinly and allow to dry briefly. The optimal spray distance is between 25 and 30 cm.

Note: The wax may be removed with hot water or high-pressure washer.

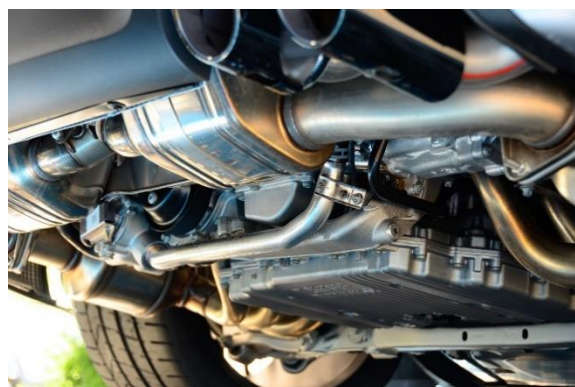

Technical Data

Property	Value
Colour	Transparent
Productivity	Ca.3 sqm (depending on the layer thickness)
Temperature stability	Up to 80°C
Application Temperature	5°C - 25°C
Storage stability	36 months
Recommended storage	5 - 25°C

Find comprehensive advice on health, safety, and environmental protection in the corresponding safety data sheets.

Available Containers

Container	Volume
Spray can	400 ml

Liability notices

This technical information leaflet is the result of careful testing and used to advise our customers. The information contained herein corresponds to our best knowledge. Since proper use does not lie within our influence, however, we can assume liability only for the perfect quality of the products we provided up to the point in time of delivery. We reserve the right to make any changes in this product information due to new knowledge.

KERONA GmbH
 Zeilbaumweg 15
 D-74613 Öhringen
 Phone: +49 7941-9205 4080
 mail@kerona.de
 www.kerona.de